



- 此閥(AND)有兩個輸入口(E1,E2)，兩個皆要輸入信號，出口(A)才會產生信號，用於邏輯及保險迴路。
- This valve(AND) has two input inlets (E1,E2), Both positions must be activated to product output signal (A). It can be used in logic circuit and safety circuit.

閥體 Valve

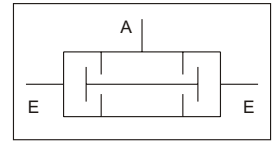

AND-□

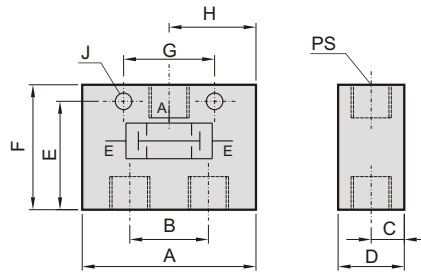

訂購標示 How to order	流量 ∅/min	重量 Weight	A	B	C	D	E	F	G	H	J	PS
AND-M5	110	20g	25	16	6	12	19	22	17.5	12.5	3.2	M5
AND-1/8"	550	40g	42	19	8	16	26.2	30.2	22	21	4	1/8"