




Symbol



- 自動排水，不需手動操作。
- 防塵、耐用、可靠，鐵罩為標準配備。
- Drainage is automatically, discharged in a reliable manner, without requiring human operators.
- Highly resistant to dust, operates reliably, and a bowl guard is provided as standard equipment.


規格表 Specifications

型式 Type	PAD-4000	PADR-4000
接管口徑 Port size (G)	1/2"	
排水口 Drain discharge port size (G)	1/4"	
最大供應壓力 Max. supply pressure (kgf/cm ²)	15	
最大操作壓力 Max. operating pressure (kgf/cm ²)	10	
調壓範圍 Regulating range (kgf/cm ²)	1 ~ 9.5	
環境和介質溫度 Ambient and media temperature (°C)	-5 ~ 60(無凍結狀態) With no freezing	
重量 Weight (kg)	0.68	0.62

訂購代號 Order No.


PAD-4000-04

- 自動排水器 Auto drain valve
- 型式 Type
- 接管口徑 Port size




尺寸圖 Dimension

PAD-4000

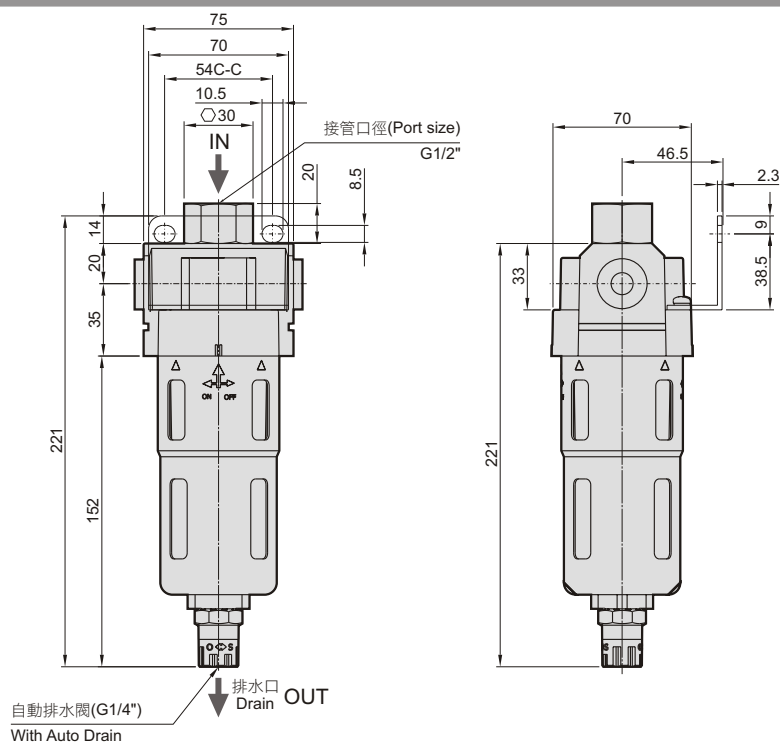

PADR-4000

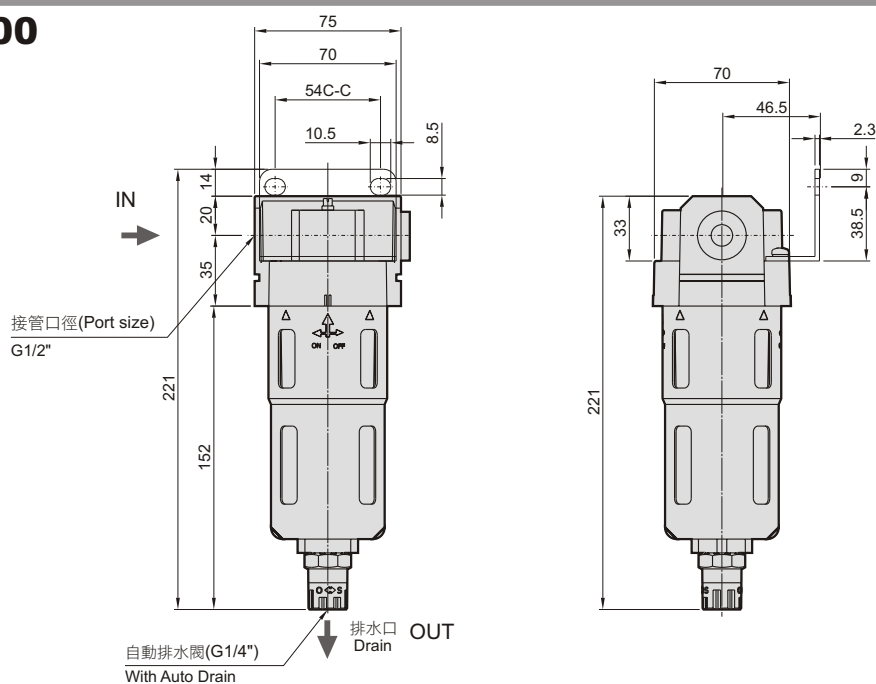

使用注意事項 Specific Product Precautions

選擇

⚠ 警告

- 使用自動排水閥需注意下列使用條件：
 - ① 安裝排水管時，要使用 $\phi 10$ 以上的管子，長度不能超過 5 米，並避免管子向上彎曲。
 - ② 壓縮機功率大於 3.7kw [400 l/min]。

Selection

⚠ Warning

- Use auto drain under the following operating conditions:
 - ① To connect a drain discharge pipe, use a pipe with a minimum bore of $\phi 10$, and a maximum length of 5 m. Avoid using a riser pipe.
 - ② Operate the compressor above 3.7 kw [400 l/min]